



**STEWART LUBRICANTS
& SERVICE CO., INC.**



HIGH PRESSURE IN-LINE FILTER ASSEMBLIES WITH **DIRT TRAP** TECHNOLOGY

BENEFITS & FEATURES

DESIGNED FOR HIGH PRESSURE HYDRAULIC & LUBRICATION APPLICATIONS

AVAILABLE IN STEEL AND 2024 ALUMINUM CONSTRUCTION.

STEEL BODIES HAVE BOTH 1/4 & 3/8 INLET AND OUTLET NPSF CONNECTIONS

ALUMINUM BODIES HAVE BOTH 1/4 INLET AND OUTLET NPSF CONNECTIONS

STEEL CONSTRUCTION BODIES ARE DESIGNED FOR HIGH PRESSURE SURGE APPLICATIONS

AIRCRAFT ALUMINUM BODIES HAVE TWO INLET AND TWO OUTLETS PORTS

BOTH BODY DESIGNS USE STANDARD DIRT TRAP ELEMENTS, WHICH ARE AVAILABLE IN BOTH GREASE AND OIL FILTRATION RANGES

FILTER ELEMENTS EASILY CHANGED WITHOUT REMOVING TUBING CONNECTIONS.

AVAILABLE FILTRATION RATINGS:

| | | |
|-----------------------|----------------------|-----------|
| OIL | | |
| 5 MICRON | 10 MICRON | 25 MICRON |
| GREASE | | |
| 150 MICRON (100 MESH) | 420 MICRON (40 MESH) | |

PRODUCT DESCRIPTION

AVAILABLE FOR OIL OR GREASE

FROM 5 TO 420 MICRON FILTRATION

ELEMENTS EASILY REPLACED

CONTAMINATION TRAPPED INSIDE THE THROW AWAY ELEMENT

HIGH PRESSURE APPLICATIONS

STEEL BODY – 7,500 PSI

AL 2024 BODY – 6,000 PSI

MOUNTS IN ANY ORIENTATION

MULTIPLE INLETS AND OUTLETS

FOR MONITORING PRESSURE, INSTALL GAUGE IN 1 INLET & 1 OUTLET

USE OPTIONAL OUTLET FOR AIR-BLEED PORT

READY FOR IMMEDIATE SHIPMENT

MADE IN



DIRT TRAPS

BODIES ARE DESIGNED FOR HIGH PRESSURE
HYDRAULIC & LUBRICATION APPLICATIONS
AVAILABLE IN CRS, 316 STAINLESS STEEL & ALUMINUM

DIRT TRAP FILTER ASSEMBLY

| STANDARD PACK: 1 EACH | | | |
|------------------------|----------------------------------|--|----------------------------------|
| FILTER RATING | PLATED CARBON STEEL 7,500 PSI | AL2024 BLUE ANODIZED ALUMINUM 6,000 PSI | 316 STAINLESS STEEL 7,500 PSI |
| 5 MICRON | SLS-DT005 | SLS-MD005 | SLS-DT005-316 |
| 10 MICRON | SLS-DT010 | SLS-MD010 | SLS-DT010-316 |
| 25 MICRON | SLS-DT025 | SLS-MD025 | SLS-DT025-316 |
| 150 MICRON 100 MESH | SLS-DT100 | SLS-MD100 | SLS-DT100-316 |
| 420 MICRON 40 MESH | SLS-DT040 | SLS-MD040 | SLS-DT040-316 |



READY FOR IMMEDIATE SHIPMENT

MADE IN



REMOTE FILL DIRT TRAP

BODIES ARE DESIGNED FOR HIGH PRESSURE
HYDRAULIC & LUBRICATION APPLICATIONS
AVAILABLE WITH PRESSURE RELIEF VALVE WITH MEMORY,
SAFETY RELIEF VALVE, FILL FITTING,
AND PRESSURE GAUGE



AVAILABLE OPTIONS

| STANDARD PACK: 1 EACH | | DESCRIPTION | PART NUMBER |
|-------------------------------|--|--|----------------|
| FILTER RATING | PLATED CARBON STEEL 7,500 PSI | PRESSURE RELIEF VALVE W/ MEMORY, 1500 PSI | SLS-PRV-1500M |
| | | PRESSURE RELIEF VALVE W/ MEMORY, 2000 PSI | SLS-PRV-2000M |
| BODY ONLY | SLS-RDT-BODY | PRESSURE RELIEF VALVE W/ MEMORY, 2500 PSI | SLS-PRV-2500M |
| ASSEMBLY W/ 5 MICRON FILTER | SLS-RDT005 | PRESSURE RELIEF VALVE W/ MEMORY, 3000 PSI | SLS-PRV-3000M |
| ASSEMBLY W/ 10 MICRON FILTER | SLS-RDT010 | PRESSURE RELIEF VALVE W/ MEMORY, 3500 PSI | SLS-PRV-3500M |
| ASSEMBLY W/ 25 MICRON FILTER | SLS-RDT025 | PRESSURE RELIEF VALVE W/ MEMORY, 4000 PSI | SLS-PRV-4000M |
| ASSEMBLY W/ 150 MICRON FILTER | SLS-RDT100 | PRESSURE RELIEF VALVE W/ MEMORY, 5000 PSI | SLS-PRV-5000M |
| ASSEMBLY W/ 100 MESH FILTER | | SAFETY RELIEF VALVE | SLS-SRV-4-4000 |
| ASSEMBLY W/ 420 MICRON FILTER | SLS-RDT040 | FILL FITTING (INCLUDES PROTECTIVE CAP) | SLS-RDT-4F |
| ASSEMBLY W/ 40 MESH FILTER | | HOSE END COUPLER | SLS-RDT-4FC |
| | | SUPPLY (1/2 NPSF) RETURN (1/4 NPSF) MANIFOLD (CRS) | SLS-RDT-SRM |

*MUST BUY ELEMENT WITH BODY

READY FOR IMMEDIATE SHIPMENT

MADE IN



80% OF ALL PUMP FAILURES ARE DUE TO LUBRICANT CONTAMINATION


If the operation is under extreme demand and “Best Practices” are unable to be followed, the Remote Fill Filter will reduce the risk of contamination being introduced into your reservoir and destroying the pump.

A common misconception in maintenance and reliability is that new lubricant is clean and ready for immediate use.

Oil/Grease tote delivery systems may contain anywhere from 2 to 20 times the acceptable amount of particulate allowable for most lubrication pumps.



REMOTE RESERVOIR FILL SYSTEM DESIGN

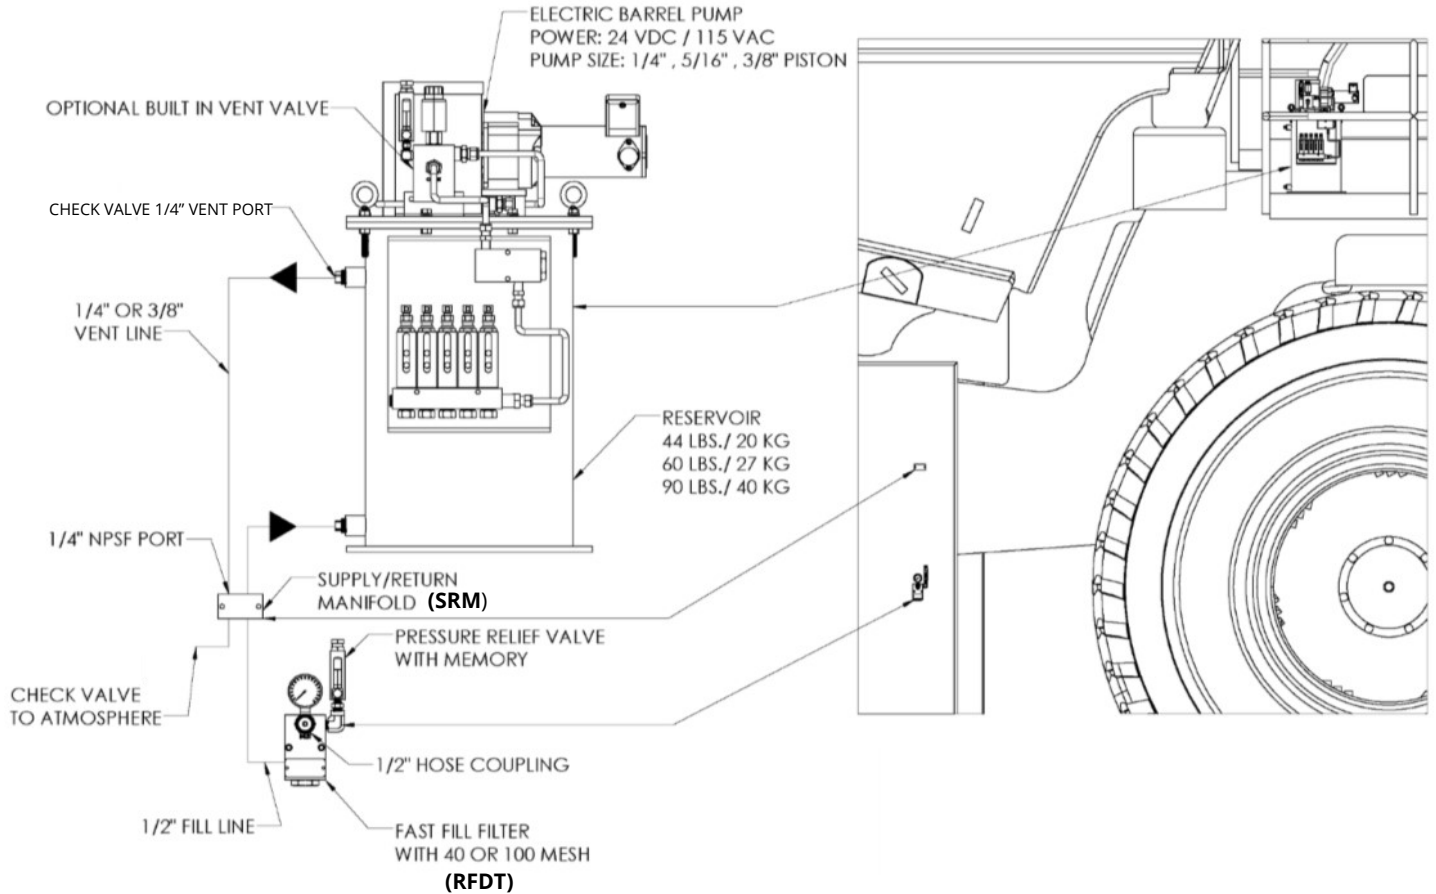

OPERATION

1. Connect hose quick coupler to fill fitting on the front of the **REMOTE FILL DIRT TRAP (RFD)**.

2. Grease is pumped through the **RFD** to the fill port on the reservoir.

If the reservoir location is remote from the **RFD**, install the **SUPPLY/RETURN**

MANIFOLD (SRM) between the **RFD** and the reservoir. If there is a considerable distance between the **RFD** and the remote reservoir, add additional **SRM** units, as required.


3. As grease is pumped into the reservoir, entrapped air above the follower is vented to atmosphere through a watertight breather, located on the top of the reservoir.

4. Once the grease reaches the **VENT PORT**, on the upper side of the reservoir, pressure will build until the **VENT PORT CHECK VALVE** opens (250 PSI), allowing grease to move down the vent line, opening the **end of vent line check valve** and providing visual indication that the reservoir is full.

Note A: In order to insure the vent line provides **POSITIVE INDICATION** that the reservoir is full, an **end of line check valve** must be installed at the **end of the vent line**. If using a **SRM**, install the **end of line check valve** into the bottom 1/4 port on the **SRM**.

Note B: If this installation includes **SUPPLY/RETURN MANIFOLDS**, tube from the reservoir **VENT PORT** to the first **SRM** and then to each subsequent **SRM**. Install the terminating check valve on the bottom 1/4 NPSF port of the last **SRM**. Install the last **SRM** close enough to the **RFD** to insure a clear view of the **end of vent line check valve**.

FUNCTION ILLUSTRATION & SPECIFICATIONS

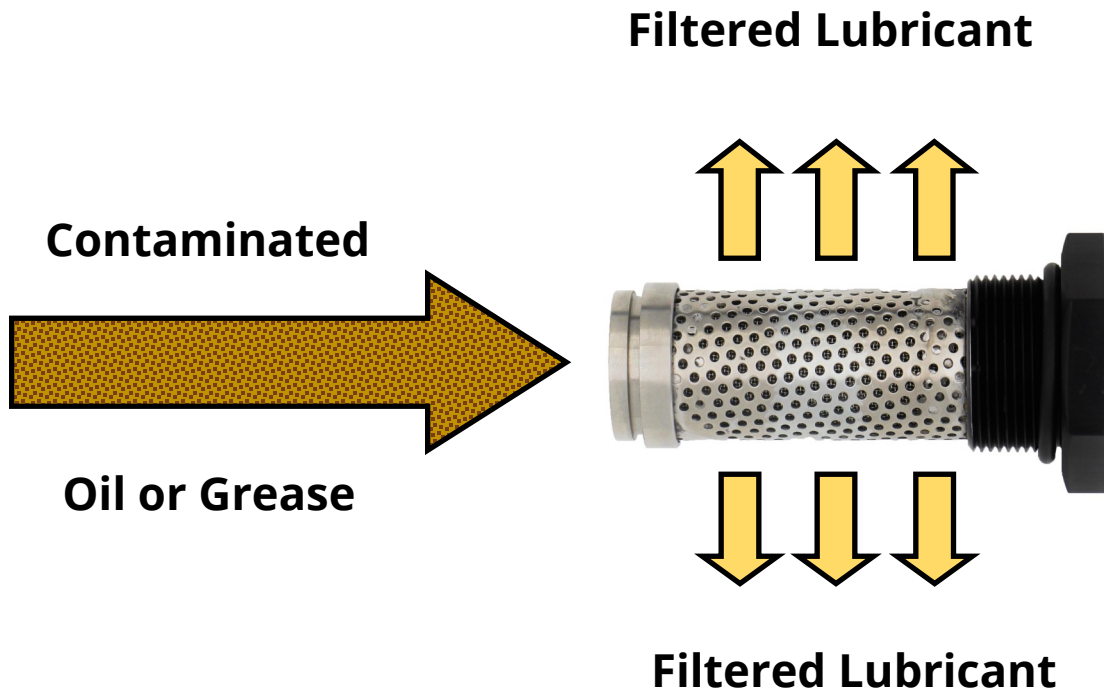

SPECIFICATIONS

MATERIAL: ZINC PLATED CARBON STEEL OR ANODIZED AL 2024
FILTER RATING: 5,10,25 MICRONS (OIL)/150, 420 MICRONS (GREASE)
PRESSURE RATING: 7,500 PSI (STEEL)/6,000 PSI (AL)
WEIGHT: 6LBS (STEEL) / 2LBS (AL)

ORDERING INFORMATION & PART NUMBERS**DIRT TRAP REPLACEMENT ELEMENT**


| STANDARD PACK: 1 EACH | | |
|------------------------------|-------------------------------------|-----------------------------------|
| FILTER RATING | PART NUMBER ALUMINUM CAP | PART NUMBER 303 SS CAP |
| 5 MICRON | SLS-ELE005-DT | SLS-ELE005-DT303 |
| 10 MICRON | SLS-ELE010-DT | SLS-ELE010-DT303 |
| 25 MICRON | SLS-ELE025-DT | SLS-ELE025-DT303 |
| 150 MICRON 100 MESH | SLS-ELE0100-DT | SLS-ELE100-DT303 |
| 420 MICRON 40 MESH | SLS-ELE040-DT | SLS-ELE040-DT303 |



NOTE: Replacement elements are compatible with both the carbon steel and 2024 Aluminum models.

DIRT TRAP MOUNTING BRACKET

| STANDARD PACK: 1 EACH | |
|------------------------------|------------------------------------|
| PART NUMBER | DESCRIPTION |
| SLS-DTMB | 316 S/S DIRT TRAP MOUNTING BRACKET |

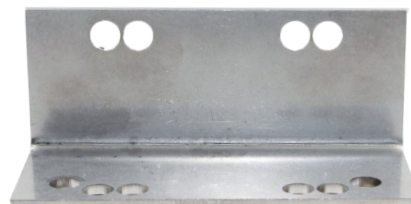

REPLACEMENT MAGNETIC DIRT TRAP ELEMENT

SPECIFICALLY DESIGNED FOR LUBRICATION AND HYDRAULIC SYSTEMS
WHERE THERE IS A REASONABLE PROBABILITY THAT THE HYDRAULIC
OR LUBRICATING OIL WILL BE CONTAMINATED WITH METAL DEBRIS

CONSTRUCTED FROM:

304SS CORE

316SS FILTRATION SCREEN

303SS INLET & TIE ROD

2024 AL & 303SS NUT

VITON O RING AND INLET SEAL

NEODYMIUM IRON BORON

PERMANENT MAGNETS (6)



OUR NEODYMIUM IRON BORON PERMANENT
MAGNETS ARE MUCH STRONGER AND HAVE A MUCH HIGHER RESISTANCE TO
DEMAGNETIZATION THAN CERAMIC, ALNICO AND SM-CO MAGNETS.

ALL CONTAMINANTS ARE TRAPPED INSIDE THE
FILTER ELEMENT AND ARE COMPLETELY REMOVED FROM THE SYSTEM
WHENEVER THE FILTER ELEMENT IS REPLACED

OUR MAGNETIC DIRT TRAP PROVIDES ONE MORE DEFENSE IN THE BATTLE AGAINST
CONTAMINATION, THE ENEMY OF HYDRAULIC OR LUBRICATION SYSTEM RELIABILITY

A CONTAMINATION FREE HYDRAULIC OR
LUBRICATION SYSTEM IS A RELIABLE SYSTEM

www.stewartlubricants.com

ORDERING INFORMATION & PART NUMBERS**MAGNETIC DIRT TRAP REPLACEMENT ELEMENT**

| STANDARD PACK: 1 EACH | | |
|-----------------------|-----------------------------|---------------------------|
| FILTER RATING | PART NUMBER ALUMINUM CAP | PART NUMBER 316 SS CAP |
| 3 MICRON | SLS-ELE003-DTMAG | SLS-ELE003-DTMAG316 |
| 5 MICRON | SLS-ELE005-DTMAG | SLS-ELE005-DTMAG316 |
| 10 MICRON | SLS-ELE010-DTMAG | SLS-ELE010-DTMAG316 |




POWERFUL ENOUGH TO CAPTURE THE
SMALLEST METAL PARTICLES.



NOTE: REPLACEMENT ELEMENTS ARE
COMPATIBLE WITH BOTH THE CARBON STEEL,
STAINLESS STEEL, AND 2024 ALUMINUM
MODELS.

FUNCTION ILLUSTRATION & SPECIFICATIONS

Filtered Lubricant

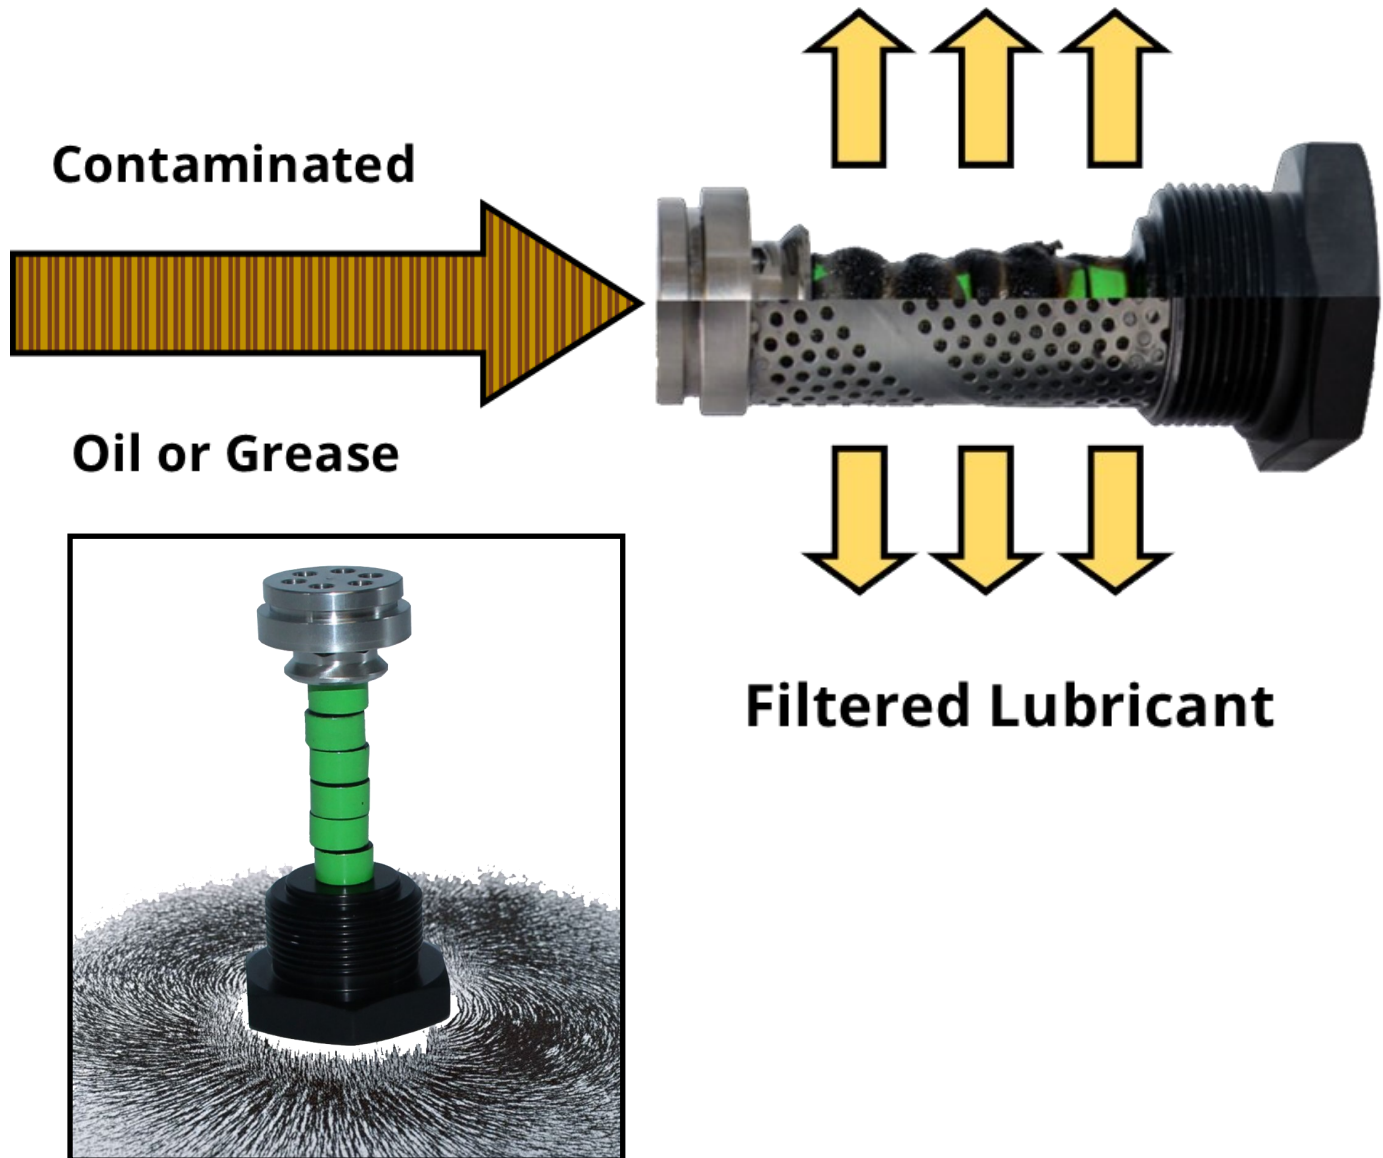

SPECIFICATIONS

MATERIAL: ZINC PLATED CARBON STEEL OR ANODIZED AL 2024

FILTER RATING: 3, 5, 10 MICRONS (OIL)/150, 420 MICRONS (GREASE)

PRESSURE RATING: 7,500 PSI (STEEL)/6,000 PSI (AL)

WEIGHT: 6LBS (STEEL) / 2LBS (AL)

DIRT TRAP ELEMENT REPLACEMENT INSTRUCTIONS

Step 1: Depressurize any residual pressure from the system.

Step 2: Remove the old filter element from the filter body. Figure 1.1

Step 3: Remove the old Filter Element's Seal from the bottom of the Filter Body. Throw away. Visually inspect the inner body for any debris that may have fallen in during disassembly. Refer to Figure 1.2

Step 4: Lightly lubricate the new Dirt Trap Element Seal & O-Ring with oil or grease and drop the seal in the filter body making sure it rests flat on the body floor above the inlet cavity. Refer to Figure 1.2

Step 5: Insert the new Dirt Trap Replacement Element into the filter body. Tighten until the element assembly bottoms out onto the filter housing. Figure 1.3

Step 6: After installing any Dirt Trap filter in an existing or new lubrication system, run the system and record the differential pressure (difference between inlet pressure reading and outlet pressure reading). When this reading increases by **50 PSI**, replace the filter element

Tech Support: Can't figure it out? Give us a call toll free at: (888) 757-5823

Figure 1.1



Figure 1.2



Figure 1.3




DIMENSIONS & MOUNTING INFORMATION

DIMENSIONS ARE IN INCHES




DIRT TRAP CARBON STEEL

7,500 PSI

TOP

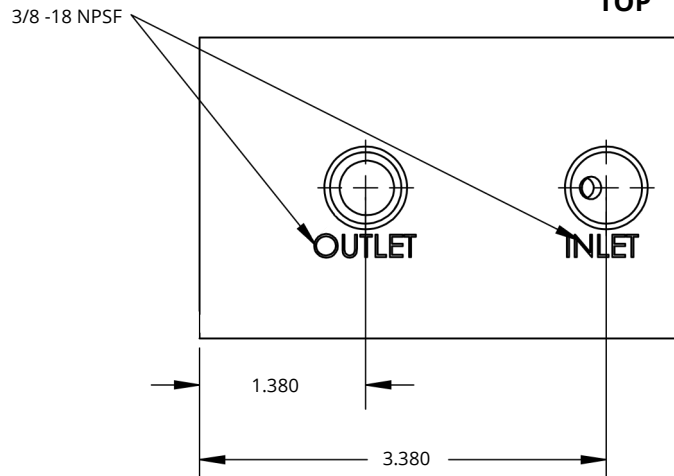


BOTTOM

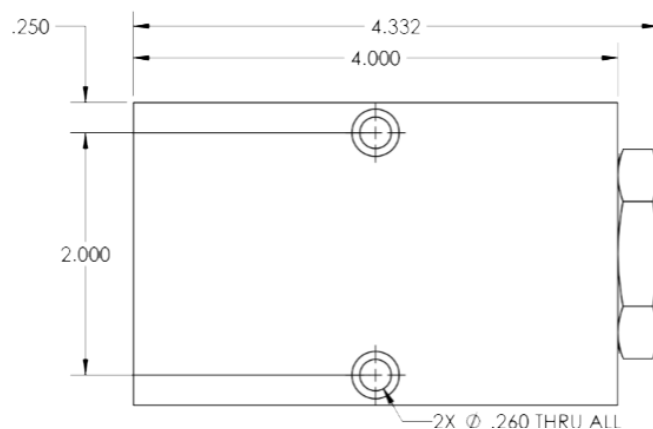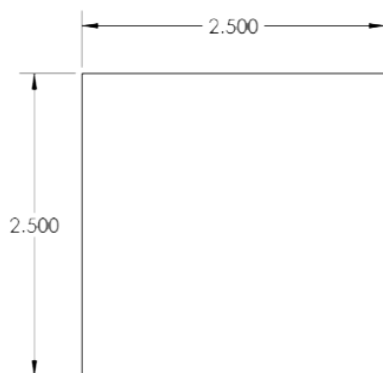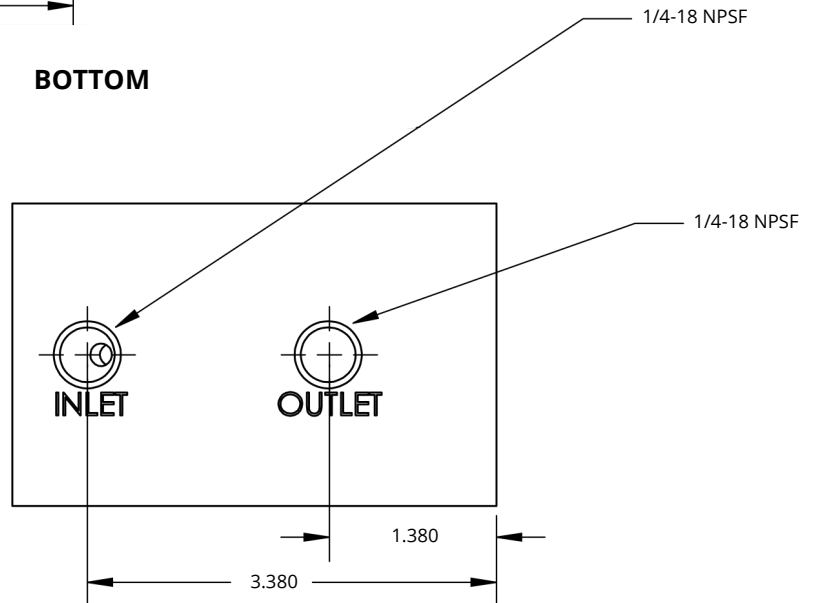




DIMENSIONS & MOUNTING INFORMATION

DIMENSIONS ARE IN INCHES

DIRT TRAP AL2025 & 316
STAINLESS

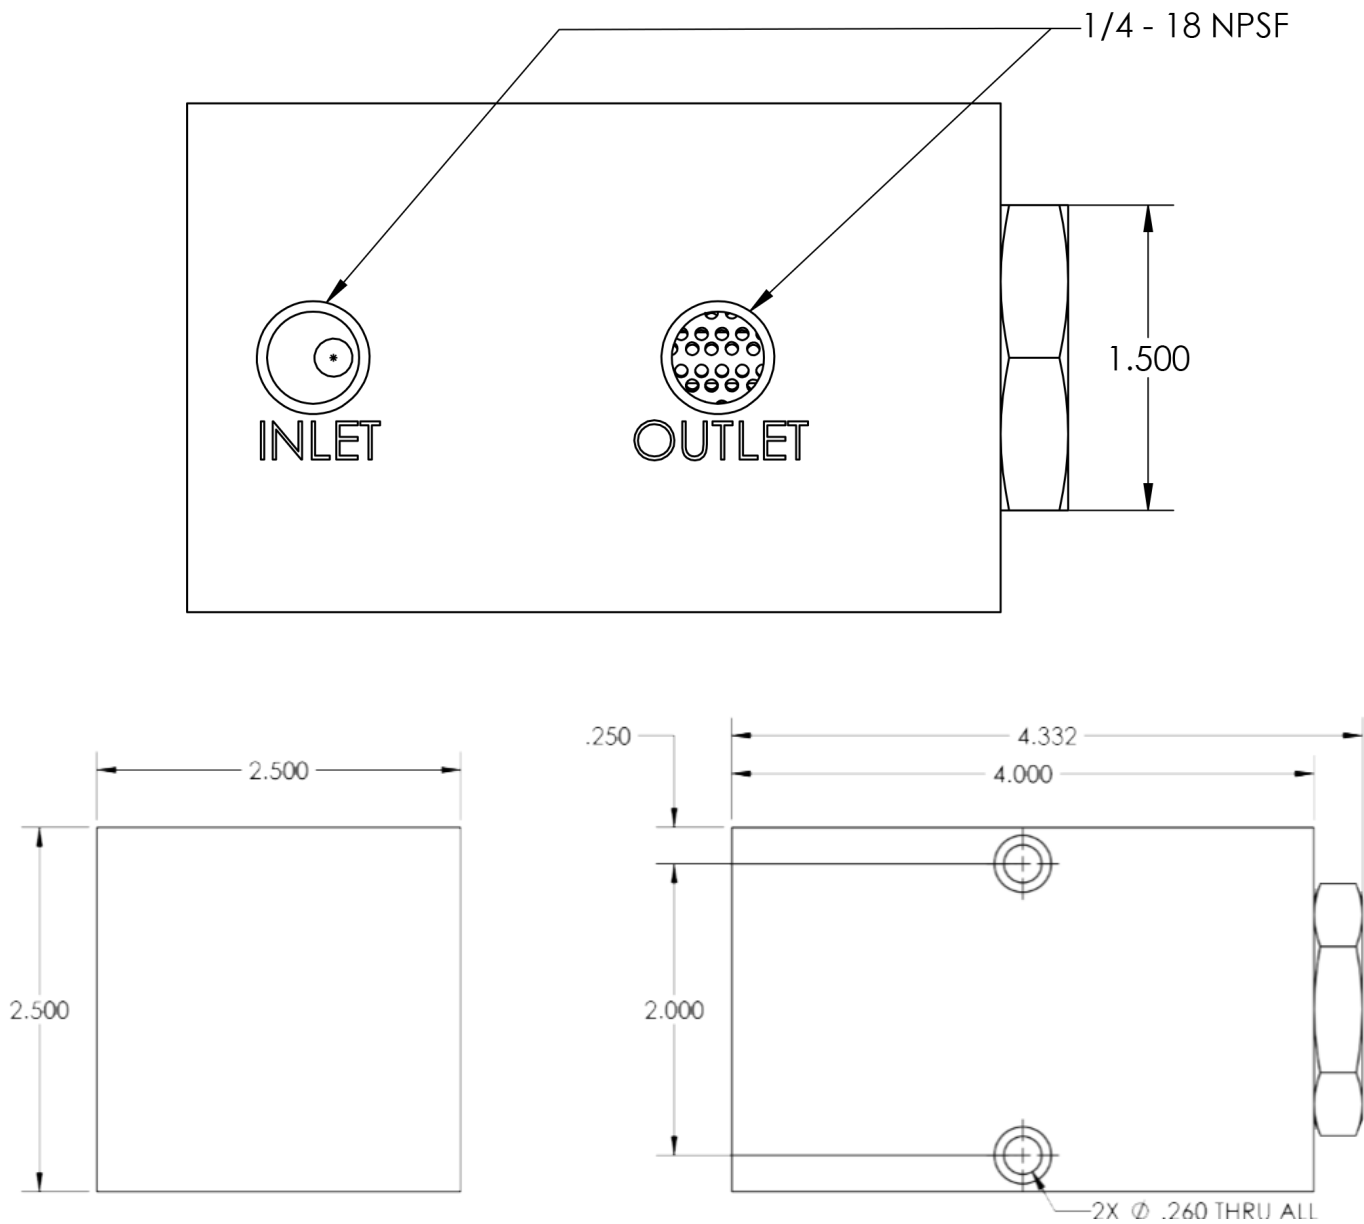

MOUNTING BRACKET DIMENSIONS

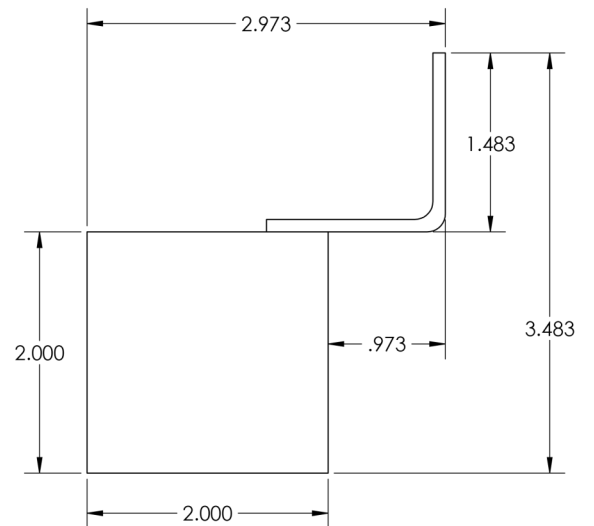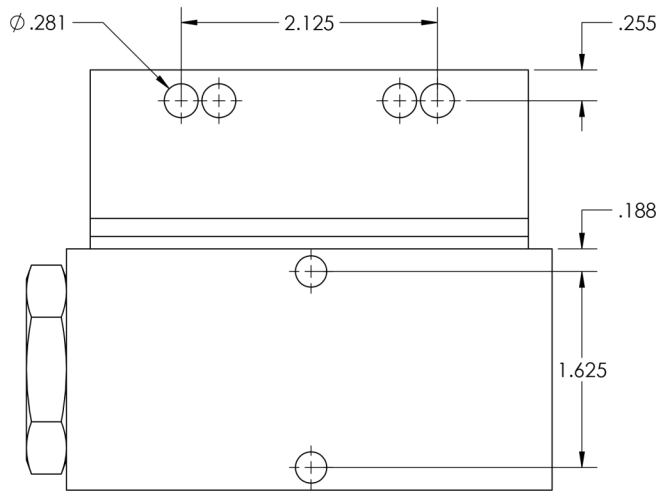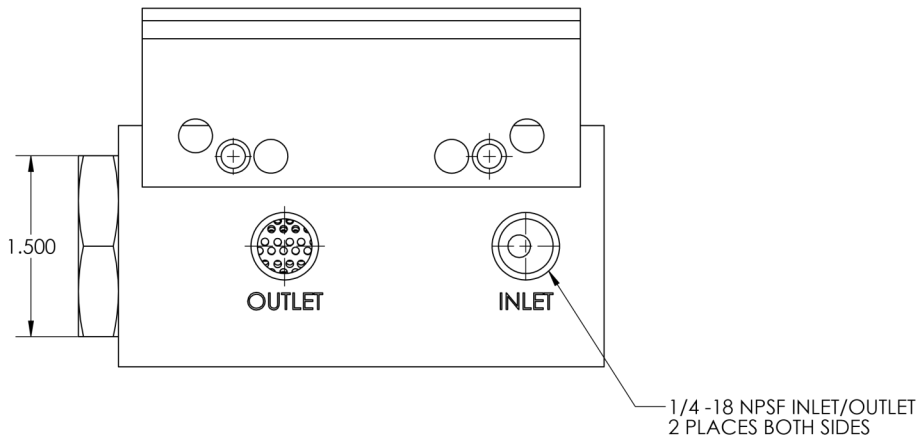

NOTES



Stewart Lubricants & Service Co., Inc.

144 Citation Court Birmingham AL 35209

Toll Free: +1.8887575823

Telephone: +1.2059454991

FAX: +1.2059426612

E-mail: slsruhe@stewartlubricants.com